
## **ferrinox<sup>®</sup>-RIVETED BOLTS**

## Tin-coated stainless steel riveted bolts

Common riveted bolts from stainless steel are nearly unbrazeable until the BRANDT Company developed a tin-coated stainless steel riveted bolt for processors

Riveted bolts with a stainless steel arbour have got a tin-coated surface and are easy to braze. According to the basic material stainless steel, ferrinox® riveted bolts are suitable for every material. Only huge shear forces can damage these stainless steel riveted bolts. The rated break point at the arbour is applied very deep so that breaches at the copper parts of the soldering set could not occur and the stainless steel arbour does not lead to any contact corrosion. The dimension of tin-coated riveted bolts from our ferrinox® system is 3,2mm x 6,0mm.



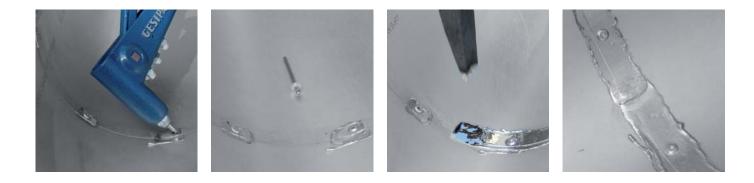



Brandt Edelstahldach GmbH Niederkasseler Strasse 3d 51147 Köln

Telefon	+49 (0)2203 63964
Web	www.brandtedelstahldach.de
Email	info@brandtedelstahldach.de